

55 Più



55 Più

Industrial technology

Manufactured using only stainless steel, aluminium and plastic materials, it can be defined as the “flag ship” of the stretch technology automatic wrapping machines, to wrap trays containing fresh foods.

It's large production capacities together with great reliability, flexibility and speed, make the 55Più the ideal choice for the use in hypermarkets and in large sized packing centres, where the need to process high volumes in an extremely short time span is of the utmost importance.

It is also available in a HS (High Speed) version where, compared to the original model, mechanical and software modifications have been introduced for ensuring speed of up to 62 packs per minute.



Main features and strength points

<ul style="list-style-type: none"> > Wrapping mainly in tray with stretch food film. 	<ul style="list-style-type: none"> > Maximum reliability and minimum wear and tear in the heaviest production environment, thanks to main mechanisms completely enclosed in a sealed oil bath.
<ul style="list-style-type: none"> > Guards with seagull wing openings, which enable easy access to the film dispensing area and to the tray elevator, thus allowing simple cleaning procedures. 	<ul style="list-style-type: none"> > Control panel with liquid crystals display fit for easy reading and fast programming, also thanks to 99 variations of pack size pre-programmed.
<ul style="list-style-type: none"> > Reduced machines' downtime for film reel replacement, thanks to the possibility of fast film reel change. 	<ul style="list-style-type: none"> > Diagnostic system, combined with the control panel, enables a fast identification of any possible anomalies.
<ul style="list-style-type: none"> > Possibility to use dedicated optional devices to wrap trays of large dimensions. 	<ul style="list-style-type: none"> > Low sound emissions, both when in stand-by and when working, give the operators the best working conditions.

Technical specifications


Speed	Variable from 35 to 55 packs/minute
Tray sizes (LxWxH)	
standard	Min 120x120x10 mm Max 230x320x200 mm (*)
option A	Min 180x180x10 mm Max 260x407x200 mm (*)
Film	All type of stretch films
Thickness	From 14 to 35 my
Film reel width	330 - 550 mm
Programmable film length	350 - 700 mm
Supply voltage	208/230/400 V three-phase + PE - 10% + 6% - 50 Hz
Installed Power	4700 W
Weight	630 Kg
Infeed	1 m included with the machine. Extensions of 1 and 2 m also available
Film transport	With belts
Ejector	Automatic height regulation
Keyboard	Monitor with piezoelectric keys

(*) It is not possible to achieve all three maximum dimensions contemporaneously on the machine

Gruppo Fabbri reserves the right to change technical specifications without prior notice

Optional devices

- > Extended infeed conveyor up to 7 m
- > In-line outlet conveyor
- > Photocell for client's belt control
- > Product exit control
- > Automatic carriage movement
- > Photocell for centring printed film
- > Support for second reel
- > Integration for elevator A
- > Side stretch device
- > Devices for special trays

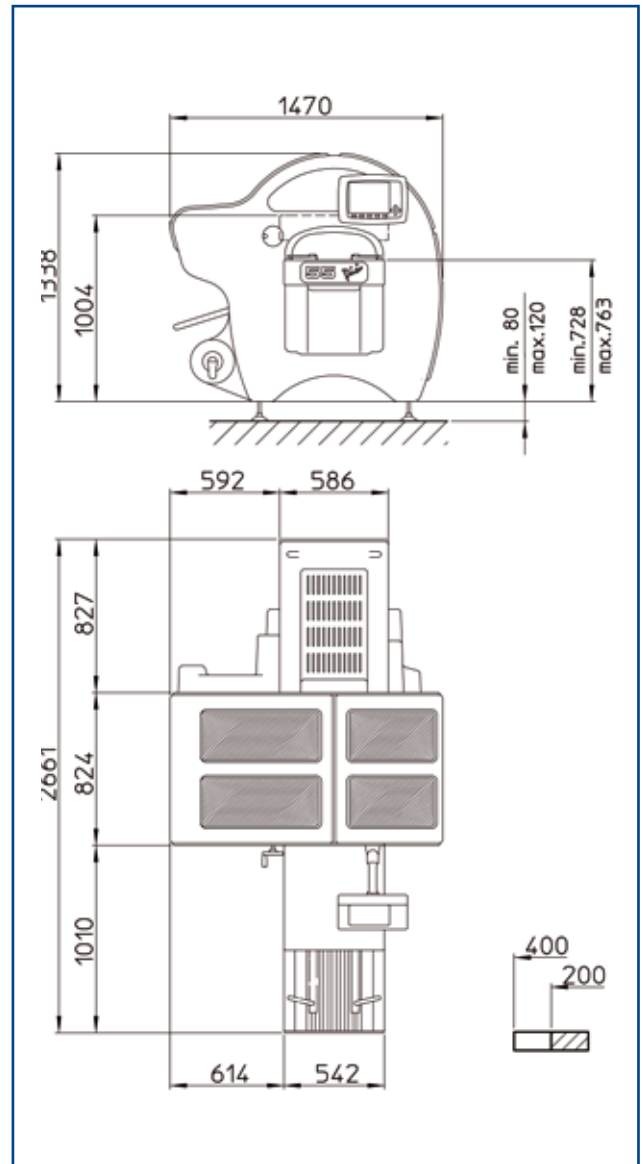

Technical drawing



For further information and tests
sales@gruppofabbri.com